

HDMI 1.4 SPLITTER 1X4 WITH EDID



BRAND: PRITECH

PART NO: PA-HDV-04

OVERVIEW:

The 1x4 HDMI splitter allows one HDMI source to be distributed to four HDMI displays at the same time. It provides a high-definition video solution ideal for supermarkets, shopping malls, HDTV/STB/DVD/projectors, DVR manufacturing, data control centers, information distribution, conference presentations, education and training, corporate showrooms, luxury homes, and more.

FEATURES:

- 1 HDMI input signal split to 4 HDMI sink devices.
- HDCP 1.4 protocol compliant.
- 3D HDMI 1.4a video format support.
- 3D video support including Frame packing for all 3D formats up to a 297MHz TMDS clock.
- Support display resolutions up to 4K x 2K@30Hz, 1080P@120Hz, and 1080P 3D@60Hz.
- Support deep color 30bit, 36bit, 48bit per pixel.
- Digital audio format, as DTS-HD/Dolby-true-HD/LPCM 7.1/DTS/Dolby-AC3/DSD.


APPLICATIONS: -

- Supermarkets
- Shopping Malls
- Control Rooms
- Home Theaters
- Classrooms
- Conference Rooms
- Showrooms
- Exhibitions & Events
- DVR/Projector Factories

SPECIFICATIONS: -

Frequency Bandwidth	2.97Gbps
HDMI Splitter Input Ports	1 x HDMI Female input port
HDMI Splitter Output Ports	4 x HDMI Female output ports
Power Supply	DC 5V 1A
ESD Protection Human Body Model:	± 8kV (air-gap discharge) ± 4kV (contact discharge)
Dimensions (mm)	70(W) X 145 (D) X 25 (H)
Weight	300g
Operating Temperature	0°C ~ 40°C / 32°F ~ 104°F
Storage Temperature	-20°C ~ 60°C / -4°F ~ 140°F
Relative Humidity	20 ~ 90% RH (Non-condensing)
Power Consumption (Max)	5W

MECHANICAL DIAGRAM:

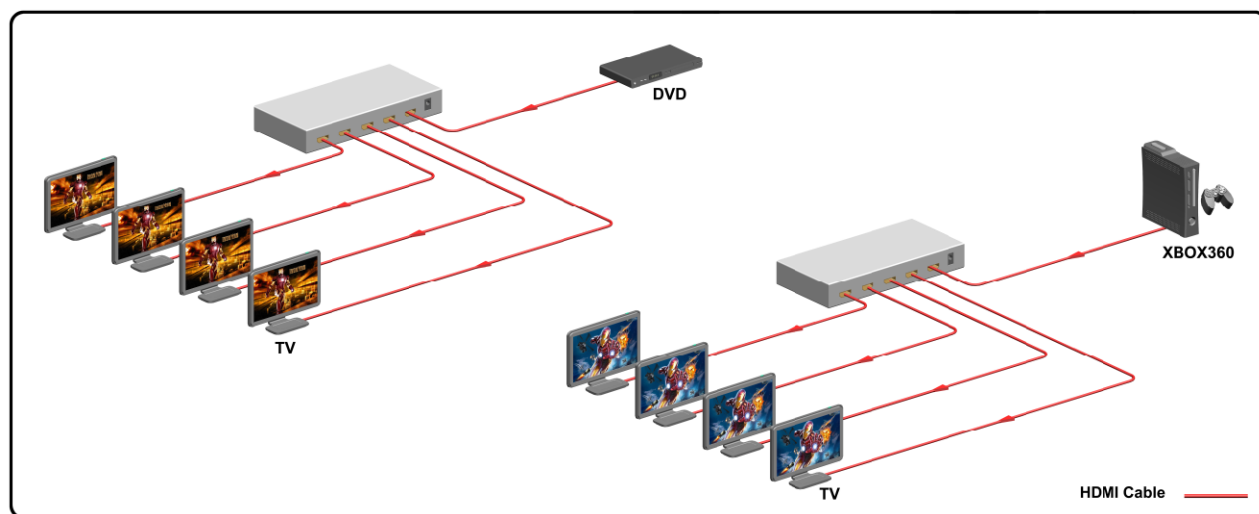

PRITECH AUTOMATION PRIVATE LIMITED

PHONE : +91 79 27702711, 09714854011
EMAIL : support@pritechautomation.com
WEBSITE : www.pritechautomation.com



ISO 9001:2015