

2 PORT VGA KVM SWITCH

BRAND: PRITECH
PART CODE: PA-UVA-2




INTRODUCTION:

The PA-UVA-2 USB KVM + Audio Switch allows one user to access two USB computers with just one VGA Monitor, set of speakers, microphone, one USB or PS/2 keyboard, USB mouse, or another USB device.

FEATURES:

- Compatible with USB computers (PC, SUN, MAC).
- Built-in 3-port USB hub for USB keyboard, mouse and other devices (printer, scanner, etc).
- Supports USB or PS/2 keyboards.
- Built-in audio ports for switching of speakers and microphone on port selection.
- Hot-plug to add or remove connected computers without powering down the switch or computers.
- Front-panel push button, hot keys for port selection.
- Keyboard and mouse emulation for simultaneous host computer boot up.
- Crisp and clear 1920x1440 video resolution.
- Compact metal case.

DIAGRAM:

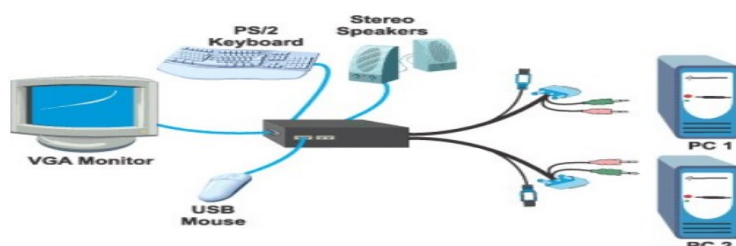

SPECIFICATION:

POWER	Powered from attached computers.
HOSTS	Two male 15-pin HD, two male USB Type A, two male 3.5mm (audio in / mic out) connectors on attached 4.6-foot cables. Compatible with USB computers (PC, SUN, MAC). Multiplatform support: Dos, Windows 98SE/ME/2000/NT/XP/Vista, Netware, Unix, Linux, MAC.
MONITOR	One female 15-pin HD connector. Supports resolutions up to 1920x1440 with no degradation.
DEVICES	One female 15-pin HD connector. Three female USB 1.1 Type A connectors. One female 6-pin miniDIN connector for keyboard. Two female 3.5mm jacks (audio in / mic in). One female 15-pin HD connector.
CONTROL METHODS	Front Panel Interface LEDs indicate currently selected port. Select port by pressing corresponding button. Keyboard Hotkey commands for port switching. Auto Scan Mode feature sequences between each powered-on computer.
DIMENSION	WxDxH (In): 4.3 x 2.5 x 1.



PRITECH AUTOMATION PRIVATE LIMITED

PHONE : +91 79 27702711, 09714854011
EMAIL : info@pritechautomation.com
WEBSITE : www.pritechautomation.com



ISO 9001:2015