

2 PORT HDMI KVM SWITCH WITH AUDIO

BRAND : PRITECH
PART NO : PA-HD1102



OVERVIEW:

2 port HDMI KVM Switches allows you to control up to 2 computers from a single console (keyboard, mouse and monitor). Switch between computers with hot keys, port selection buttons or mouse. Plug-and-play setup does not require software installation.

FEATURES:


- One PA-HD1102 controls 2 HDMI computers or HDMI devices
- Support audio
- Support USB2.0 HUB
- Multiplatform support – Windows, Linux, Mac, Unix
- Easy switching between PCs via front panel pushbuttons, keyboard hotkeys
- Hot pluggable – add or remove computers without having to power down the switch
- Superior resolution - 3840×2160 @ 60 Hz
- Supports widescreen resolutions

TECHNICAL :

Computer Connection	2
Port Selection	Hotkey, button
CONNECTOR	
CONSOLE	
Monitor	1x HDMI Type A
Keyboard Mouse	1x double layer USB type A
Mic	1x Min stereo port (pink)
Speaker	1x Min stereo port (green)
PC	
Monitor	2x HDMI Type A
Keyboard Mouse	2x USB type B
Mic	2x Min stereo port (pink)
Speaker	2x Min stereo port (green)
USB2.0 port	2x USB type A

Power		1x DC socket
Switch	Port Selection	1x button
LEDs	Selected	2 (Blue)
Resolution		3840×2160 @ 60 Hz
Power Consumption		2W
Power Input		5V- 12V DC
Operating Temperature		0 ~ 50 °C
Storage Temperature		-20 ~ 60°C
Humidity		0~80% RH, non-condensing
Net Weight		0.4kg
Dimension (W × D × H)		185mm × 74mm × 32.5mm

DIAGRAM :

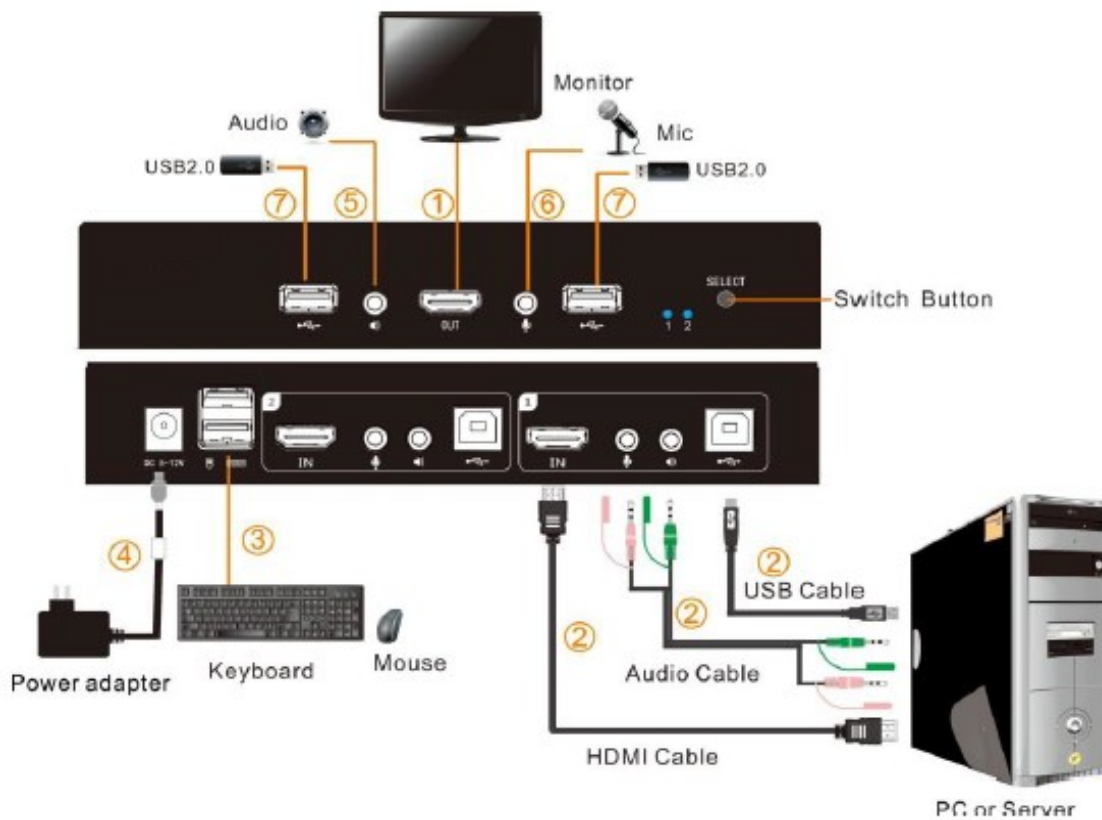

PRITECH AUTOMATION PRIVATE LIMITED

PHONE : +91 79 27702711, 09714854011
 EMAIL : sales@pritechautomation.com
 WEBSITE : www.pritechautomation.com



ISO 9001:2015

