

UHDN-4P-Quad

4-Port Quad Head Ultra 4K-60Hz KVM Switch



4-Port Quad Head HDMI (4K/60Hz) Ultra-HD KVM switch with USB 2.0 and audio support.

FEATURES

- Supports up to Ultra-HD 4K (3840x2160) @ 30/50/60Hz.
- Supports 3D.
- Supports LPCM, Dolby-AC3, DTS7.1, and DSD/Dolby TrueHD/DTS-HD master audio.
- Supports HDMI 1.3, 1.4, & 2.0.
- HDMI and HDCP compliant.
- Control up to four quad head computers with a single KVM.
- Full EDID HDMI video emulation.
- Zero pixel loss with TMDS signal correction.
- Supports USB Keyboard-Mouse emulation.
- Supports all USB 2.0 devices.
- Optionally rack mountable.
- Hot key commands for quick channel selection.
- Independent (asynchronous) switching of KVM and peripheral USB ports. Users can scan a document and save in another computer.
- Complete KVM emulation for error free booting.
- Easy switching via front-panel, RS-232 or hot keys.
- Full HDMI support, backwards compatibility.



OVERVIEW

UHDN-4P-Quad is a multi-platform KVM switch capable of managing four quad-head 4K computers through a single KVM. Built with ultra-HD ready HDMI outputs, the UHDN-4P-Quad is the first quad-head HDMI KVM switch on the market to offer full 4K at 60Hz directly from the device. Until now, HDMI switches lost emulated picture when disconnected from monitors, leading to confusion and disorganization upon reconnecting. With UHDN-4P-Quad, full EDID-assisted HDMI video emulation ensures visual workspaces and screen resolutions are remembered every time: simple!

The UHDN-4P-Quad is HDCP compliant, supporting screen resolutions up to 4K Ultra-HD (3840x2160 @ 60Hz) with responsive EDID emulation. Additionally, the UHDN-4P-Quad is USB peripheral-friendly, compatible with printers, keyboards, and mice. The UHDN-4P-Quad is also easy to control with both a simple front-panel interface, as well as RS-232 or hot-keys.

SOURCE SWITCHING MADE EASY

The UHDN-4P-Quad offers simplified management between four quad-head HDMI equipped computers' USB 2.0 outputs. Keyboards, mice, and other connected USB devices can be switched between with ease. This dynamic KVM switch can be controlled via hot keys or RS-232 commands, as well as directly through the console's easy-to-read front panel.

EDID PASS-THROUGH AND RECOGNITION

The UHDN-4P-Quad features EDID Pass-Through technology and source recognition, which enables smooth and efficient switching in virtually any scenario. This plug-and-play EDID functionality makes set up hassle free and simple.

FULL USB KEYBOARD AND MOUSE EMULATION

The USB keyboard and mouse emulation utilized by UHDN-4P-Quad provides quick source switching via keyboard hot keys. UHDN-4P-Quad simulates the presence of a keyboard and mouse for every attached computer. This essential function simulates keyboard and mouse control for all connected computers, so switching between each is kept seamless and completely uninterrupted.

REAL-WORLD APPLICATIONS

The UHDN-4P-Quad has a broad range of applications, but the main function is to centralize the access of up to four computers with HDMI displays. Not only does it function as a KVM console, but it also supports USB 2.0 functionality. This allows users to access nearby USB devices, including those not supported by other KVM switches. The UHDN-4P-Quad is the ideal solution for medical, industrial, studio and defense applications, where it is not practical or safe to have multiple CPUs in the vicinity of the workstation.

- Server Hubs
- Retail Spaces
- Educational Facilities
- Airports
- Dealer Rooms
- Hospitals/Medical Care
- Control Rooms
- Audio/Visual Presentation Spaces
- Restaurants and Eateries
- Hotels/Resorts


FLEXIBLE CONTROL

USB/KEYBOARD: Hot keys enable the user to switch and control all the different functions of the KVM switch.

RS-232: Any external device or program supporting RS-232 can control the UHDN-4P-Quad. The UHDN-4P-Quad uses a very simple protocol that enables easy integration with other devices.

DIAGRAM

Smart-AVI UHDN-4P-QUAD

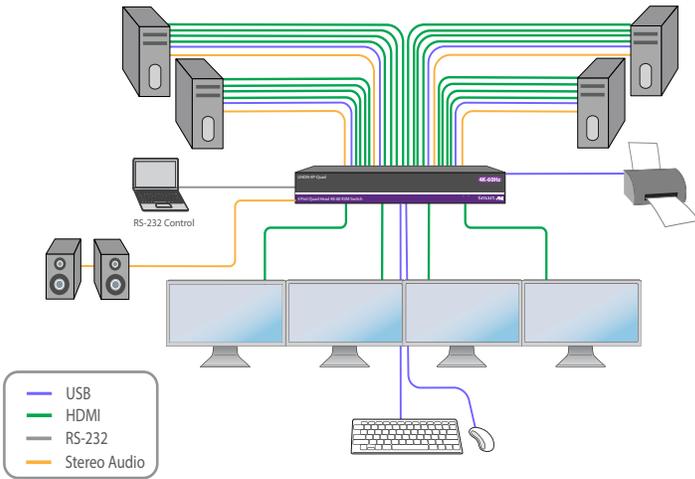

UHDN-4P-Quad Front



UHDN-4P-Quad Rear

SPECIFICATIONS

| VIDEO | | USB | |
|-------------------------------|-------------------------------------|------------------------|--|
| Link Rate | 5.4 Gbps/lane | Signal Type | USB 2.0, 1.1, and 1.0 w/ internal hub |
| Input Interface | (16) HDMI (female) Version 1.4 | Input Interface | (4) USB Type B (female) |
| Output Interface | (4) HDMI (female) Version 1.4 | Device Input Interface | (2) USB 1.1 Type A (female) for keyboard-mouse (2) USB 2.0 Type A Transparent |
| Resolution | 480i to 4Kx2K @ 60Hz (YUV420) | OTHER | |
| Input Equalization | Automatic | Power | External 100-240 VAC/ 5VDC4A @ 20W |
| Video Bandwidth | 300 MHz, 10.2 Gbps | Consumption | 20 W (Max) |
| HDCP Compliant | Yes | Dimensions | 4.5" H x 5.75" D x 12.75" W |
| Input/Output Max Cable Length | 20 ft (depending on cable quality) | Weight | 5.75 lbs |
| AUDIO | | Approvals | UL, CE, ROHS Compliant |
| Input Interface | (4) 3.5mm stereo audio jack | Operating Temp. | -5 to +35°C (+23 to +95°F) |
| Output Interface | (1) 3.5mm stereo audio jack | Storage Temp. | -4-185°F (-20-85°C) |
| Frequency Response | 20Hz ~ 20KHz | Humidity | 5 to 90% (No Condensation) |
| Common Mode | Rejection @ 60dB | | |
| Nominal Level | 0.0 to 1.0 V | | |
| CONTROL | | | |
| Front Panel | Buttons (SELECT audio/video source) | | |
| RS-232 | Via Control @ 9600 bps | | |
| Hot Keys | Via Keyboard | | |
| Emulation | Keyboard, Video and Mouse | | |

ORDERING INFORMATION

| Part No. | Description |
|---------------|---|
| UHDN-4P-QUADS | 4-Port Quad Head Ultra 4K-60 KVM Switch. Includes: [UHDN-4P-Quad & (PS5VD4A)] |



Designed and Manufactured in the USA

www.smartavi.com

Tel: 800.AVI.2131 • 818.503.6200 • 11651
Vanowen St. North Hollywood, CA. 91605

Smart-AVI
SMART AUDIO VIDEO INNOVATION