


# HDMI KVM EXTENDER 60 MTR

**BRAND: PRITECH**  
**PART NO. : PA-HKE-60**

## OVERVIEW

This HDMI Extender includes a transmitter unit (TX) and a receiver unit (RX), working as a pair. It allows for transmission and extension uncompressed full HD 1080p@60Hz HDMI signal via CAT6/6A/7 network cable, the transmission distance is up to 60 meters with zero latency. At the same time, the signal is stable, and the built-in EDID greatly improves the compatibility of the device. It supports keyboard mouse remote control and local loop-out, also it supports PoC to power the sender/receiver.

- The metal case design protects the interior and provides excellent heat dissipation, further enhancing durability for reliable performance and long life.
- Transmits HD video and audio signals up to 196ft/60m over a single CAT6/6a/7 cable.
- Local HDMI output on transmitter for preview
- Support keyboard and mouse control, real-time remote control of computer equipment.
- Support copy EDID, can match many kinds of display device
- Plug-and-play operation with no software required for easy, immediate installation
- Delivers HD picture quality at resolutions up to 1920\*1080 @60Hz, 3D signals
- Enjoy bright, clear video with accurate colour rendition and sharpness, even when long distance transmission.
- 196ft/60m HDMI KVM Extender Over Cat6
- High resolution up to 1080P@60hz, 3D
- Point to point 196ft/60m over a single cat6
- Local HDMI output on transmitter for preview
- Support keyboard and mouse remoter control
- Support EDID and POC function
- No software required, plug and play

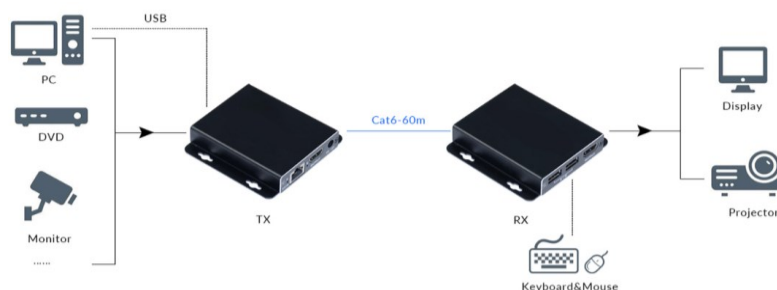

## SPECIFICATIONS

<b>Standards</b>	HDMI 2.0, HDCP 2.0
<b>Maximum Pixel Clock</b>	165MHz
<b>Maximum Data Rate</b>	6.75 Gbps
<b>Resolution</b>	1920*1080@60Hz (backward-compatible)
<b>HDMI Impedance</b>	100 Ω
<b>HDMI Connector</b>	HDMI-A
<b>USB Interface</b>	PC: Standard MINI-USB or PS2 K/M: Standard USB, PS2(Optional)
<b>USB Signal</b>	HID Signal
<b>Transmission Distance</b>	CAT6---60M
<b>Interface</b>	RJ45
<b>Power Supply</b>	The Power Adapter: DC 12 V
<b>Power Dissipation</b>	MAX 4W
<b>Temperature</b>	Operating: -5 C ~ +70 C
<b>Humidity</b>	Operating: 5% ~ 90%
<b>Dimension</b>	82x85x17 mm



**PRITECH AUTOMATION PRIVATE LIMITED**

PHONE : +91 79 27702711, 09714854011

EMAIL : sales@pritechautomation.com

Website : www.pritechautomation.com



**ISO 9001:2015**