


HDMI KVM EXTENDER – 120M

BRAND: PRITECH
MODEL.: PA-HKE-120

OVERVIEW

This HDMI Extender includes a transmitter unit (TX) and a receiver unit (RX), working as a pair. It allows for transmission and extension full HD 1080p@60Hz HDMI signal via CAT5e/6 UTP network cable, the transmission distance is up to 120meters; Support Keyboard and mouse control and IR pass back transmission, have a local HDMI output.

- PA-HE-120 120m HDMI extender Delivers HD picture quality at resolutions up to 1920*1080 @60Hz
- Enjoy bright, clear video with accurate colour rendition and sharpness, even when long distance transmission.
- PA-HE-120 extender HDMI 120m transmits HD video and audio signals up to 196ft/60m over a single CAT6/6a/7 cable.
- Local HDMI output on transmitter for preview
- PA-HE-120 120m HDMI network extender support IR (20-60Khz) signal return control
- Plug-and-play operation with no software required for easy, immediate installation
- High resolution up to 1080P@60hz, 3D
- Point to point 120m over a single cat6
- Local HDMI output on transmitter for preview
- Supports IR transmission
- No software required, plug and play

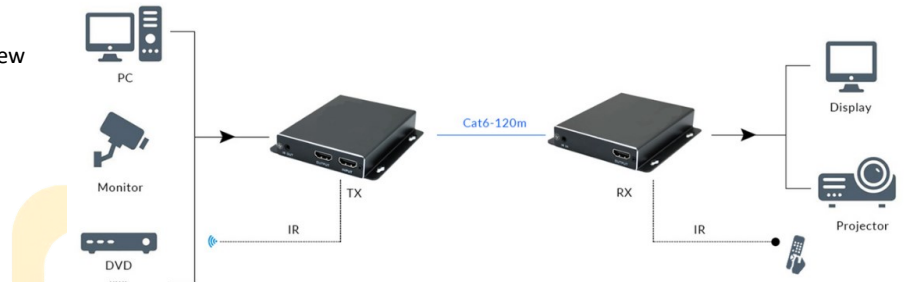

SPECIFICATIONS

Standards	HDMI 2.0, HDCP 2.0
Maximum Pixel Clock	165MHz
Maximum Data Rate	6.75 Gbps
Resolution	1920*1080@60Hz (backward-compatible)
HDMI Impedance	100 Ω
HDMI Connector	HDMI-A
HDMI Cable	Less than 5m at 1080p@60hz
IR Interface	3.5mm earphone seat
IR Signal Direction	Unidirectional
IR Signal Type	Digital
IR Frequency	20-60kHz
RJ45 Interface	RJ45 (IEEE - 568b connection)
Transmission Distance	CAT6—120M
Interface	RJ45
Power Supply	The Power Adapter: DC 5V/1A
Power Dissipation	MAX 4W
Temperature	Operating: -5 C ~ +70 C
Humidity	Operating: 5% ~ 90%
Dimension	100x97.5x17 mm



PRITECH AUTOMATION PRIVATE LIMITED

PHONE : +91 79 27702711, 09714854011
EMAIL : info@pritechautomation.com
WEBSITE : www.pritechautomation.com

